Form 3160-3 FORM APPROVED (August 2007) OMB No. 1004-0137 Expires July 31, 2010 UNITED STATES Lease Serial No. DEPARTMENT OF THE INTERIOR UTU-01301 BUREAU OF LAND MANAGEMENT 6. If Indian, Allotee or Tribe Name APPLICATION FOR PERMIT TO DRILL OR REENTER 7. If Unit or CA Agreement, Name and No. **V** DRILL la. Type of work: REENTER 8. Lease Name and Well No. Oil Well ✓ Gas Well lb. Type of Well: ✓ Single Zone Multiple Zone Hatch 923-15P 9. API Well No. 43-44-40063 Name of Operator Kerr-McGee Oil & Gas Onshore, LP 3a. Address 3b. Phone No. (include area code) 10. Field and Pool, or Exploratory 720.929.6226 1099 18th Street #600, Denver, CO 80202 Natural Buttes Field 4. Location of Well (Report location clearly and in accordance with any State requirements.*) 11. Sec., T. R. M. or Blk. and Survey or Area At surface SESE 650' FSL & 860' FEL LAT 40.030550 LON -109.306000 (NAD 27) Sec. 15, T 9S R 23E At proposed prod. zone N/A 14. Distance in miles and direction from nearest town or post office* 12. County or Parish 13. State 24 miles east of Ouray, Utah Uintah UT Distance from proposed* 17. Spacing Unit dedicated to this well 16. No. of acres in lease location to nearest 40 acres property or lease line, ft. (Also to nearest drig. unit line, if any) 2520 acres 18. Distance from proposed location* 19. Proposed Depth 20. BLM/BIA Bond No. on file to nearest well, drilling, completed, WYB000291 8570' applied for, on this lease, ft. 21. Elevations (Show whether DF, KDB, RT, GL, etc.) 22. Approximate date work will start* 23. Estimated duration 5072' GL 10 days 24. Attachments The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form: 1. Well plat certified by a registered surveyor. 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). A Drilling Plan. 3. A Surface Use Plan (if the location is on National Forest System Lands, the 5. Operator certification SUPO must be filed with the appropriate Forest Service Office). Such other site specific information and/or plans as may be required by the 25. Signature Name (Printed/Typed) Date

Kin mi L	Kevin McIntyre	05/02/2008
Title Regulatory Analyst	·	
Approved by Signature	Name (Printed/Typed) BRADLEY G. HILL	Date (55-17-08
Title	OF MINISTRAL MANAGER	100 1200

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2

MAY 0 9 2008

Federal Approval of this Action is Necessary

DIV. OF OIL, GAS & MINING

644545X 44323164 40.03.0578 -109.305948

T9S, R23E, S.L.B.&M. Well location, HATCH #923-15P, located as shown -52.80' (G.L.O.) S89'52'05"W S89'52'27"W in the SE 1/4 SE 1/4 of Section 15, T9S, R23E, 1374.66' (Meas.) S89'52'25"W - 2590.14' (Meas.) 1321.92' (Meas.) S.L.B.&M., Uintah County, Utah. 1977 Bross Cop. 1977 Brass Cap. 1977 Bross Cop. 0.7' High, Mound Comer 1977 Brass Cap. 0.5' High. Set 0.5' High. Set BASIS OF ELEVATION 0.8' High, Pile of Stones Fence Post 0.5" Fence Post 0.5' of Stones NLY North of Cop North of Cop BENCH MARK 58 EAM (1965) LOCATED IN THE NE 1/4 OF SECTION 30, T9S, R23E, S.L.B.&M. TAKEN FROM THE RED WASH SE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY, SAID ELEVATION IS MARKED AS BEING 5132 FEET. BASIS OF BEARINGS N. 55,60.001 NOO"11"02"W BASIS OF BEARINGS IS A G.P.S. OBSERVATION. 1977 Brass Cap. 1977 Brass Cap, 0.5' High, Pile 1.0' High, Pile of Stones of Stones 500 SCALE CERTIFICATE THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS WAS BY THE STUDIES MY SUPERVISION AND THAT THE SAME ARE THE MY CORRECT TO THE BEST OF MY KNOWLEDGE AND BULLET HATCH #923-15P 860 Elev. Ungraded Ground = 5072' 1977 Bross Cop. 1977 Brass Cap. 0.5' High, Pile 1977 Brass Cop. 0.5' High of Stones 1.0' High, Pile STATE OF UTARY N89'58'59"E - 2657.57' (Meas.) N89'18'06"E - 2642.52' (Meas.) of Stones LAND SURVEYING UINTAH ENGINEERING VERNAL UTAH 84078 (NAD 83) 85 SOUTH 200 EAST LEGEND: LATITUDE = 40.01'49.86'' (40.030517) (435) 789-1017 LONGITUDE = 109'18'24.04'' (109.306678) SCALE: DATE SURVEYED: DATE DRAWN: 90° SYMBOL (NAD 27) 1" = 1000' 11-21-07 12-03-07 LATITUDE = 40.01'49.98'' (40.030550) PROPOSED WELL HEAD. PARTY REFERENCES LONGITUDE = 109'18'21.60'' (109.306000) J.R. C.H. D.A. G.L.O. PLAT SECTION CORNERS LOCATED. WEATHER FILE Δ = SECTION CORNERS RE-ESTABLISHED. (Not Set on Ground.) COLD Kerr-McGee Oil & Gas Onshore LP

Kerr-McGee Oil & Gas Onshore LP

Hatch 923-15P SESE Sec. 15, T9S,R23E UINTAH COUNTY, UTAH UTU-01301

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. <u>Estimated Tops of Important Geologic Markers:</u>

Formation	<u>Depth</u>
Uinta	0- Surface
Green River	1578
Bird's Nest	1846'
Mahagony	2176'
Wasatch	4525'
Mesaverde	7326'
TD	8570'

2. Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:

Substance	<u>Formation</u>	<u>Depth</u>
Water	Green River	1578'
Water	Bird's Nest	1846'
Water	Mahagony	2176'
Gas	Wasatch	4525'
Gas	Mesaverde	7326'
Water	N/A	
Other Minerals	N/A	

3. <u>Pressure Control Equipment</u> (Schematic Attached)

Please refer to the attached Drilling Program.

4. <u>Proposed Casing & Cementing Program:</u>

Please refer to the attached Drilling Program.

5. <u>Drilling Fluids Program</u>:

Please refer to the attached Drilling Program.

6. Evaluation Program:

Please refer to the attached Drilling Program.

7. <u>Abnormal Conditions</u>:

Maximum anticipated bottomhole pressure calculated at 8570' TD, approximately equals 5313.4 psi (calculated at 0.62 psi/foot).

Maximum anticipated surface pressure equals approximately 1885.4 psi (bottomhole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

8. <u>Anticipated Starting Dates:</u>

Drilling is planned to commence immediately upon approval of this application.


9. <u>Variances:</u>

Please refer to the attached Drilling Program.

10. Other Information:

Please refer to the attached Drilling Program.

EXHIBIT A

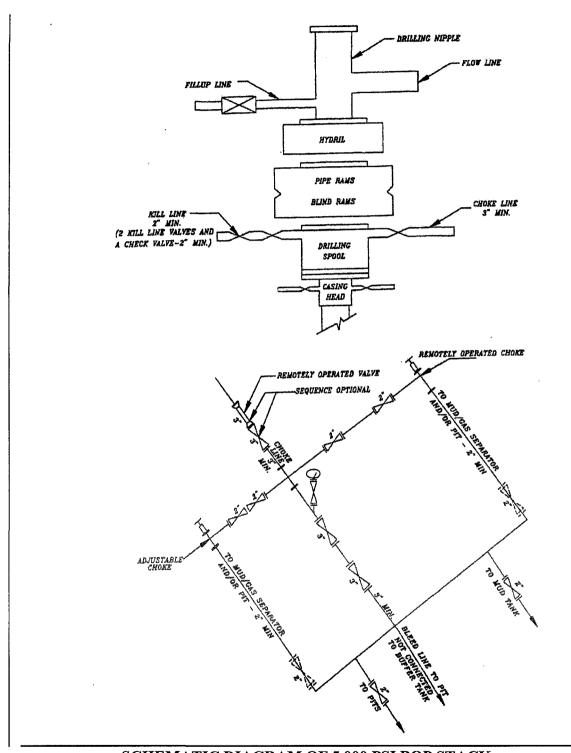

SCHEMATIC DIAGRAM OF 5,000 PSI BOP STACK

Hatch 923-15P SESE SEC 15-T9S-R23E UINTAH COUNTY, UTAH UTU-01301

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. Existing Roads:

Directions to the proposed location are attached.

Refer to Topo Maps A and B for location of access roads within a 2-mile radius.

All existing roads will be maintained and kept in good repair during all drilling and completion operations associated with this well.

2. Planned Access Roads:

The proposed access road is approximately 260' +/-. Refer to Topo Map B.

The access road will be crowned (2 to 3%), ditched and constructed with a running surface of 18 feet and a maximum disturbed width of 30 feet. Graveling or capping the roadbed will be performed as necessary to provide a well constructed, safe road. Prior to construction or upgrading, the proposed road shall be cleared of any snow and allowed to dry completely.

Surface disturbance and vehicular traffic will be limited to the proposed location and proposed access route. Any additional area needed will be approved in advance. All construction shall be in conformance with the standards outlined in the BLM and Forest Service publication: Surface Operating Standards for Oil and Gas Exploration and Development. 1989.

The road surface and shoulders will be kept in a safe and usable condition and will be maintained in accordance with the original construction standards. All drainage ditches will be kept clear and free-flowing and will be maintained according to original construction standards. The access road surface will be kept free of trash during operations. All traffic will be confined to the approved disturbed surface. Road drainage crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossing or shall the drainages be blocked by the road bed. Erosion of drainage ditches by runoff water shall be prevented by diverting water off at frequent intervals by means of cutouts. Should mud holes develop, they shall be filled in and detours around them avoided. When snow is removed from the road during the winter months, the snow shall be pushed outside of the borrow ditches, and the turnouts kept clear so that snowmelt will be channeled away from the road.

3. <u>Location of Existing Wells Within a 1-Mile Radius:</u>

Please refer to Topo Map C.

4. Location of Existing & Proposed Facilities:

The following guidelines will apply if the well is productive.

All production facilities will be located on the disturbed portion of the well pad and at a minimum of 25 feet from the toe of the back slope or the top of the fill slope.

A dike will be constructed completely around those production facilities which contain fluids (i.e., production tanks, produced water tanks, and/or heater/treater). These dikes will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of the largest tank, and be independent of the back cut.

All permanent (on-site six months or longer) above the ground structures constructed or installed, including pumping units, will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the five state Rocky Mountain Inter-Agency Committee.

All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded. The requested color is Carlsbad Canyon (2.5 Y 6/2) as determined during the on-site inspection.

Any necessary pits will be properly fenced to protect livestock and prevent wildlife entry.

Refer to Topo Map D for the placement of the proposed pipeline.

Exceptions to Best Management Practices (BMPs) Requested:

Approximately 6915' of 4" steel pipeline will be installed on surface within the access corridor for the well location. As a Best Management Practice (BMP), the pipeline would be buried within the access road corridor if possible. The construction of pipelines requires the corridor of 30 feet.

This exception to the BMP should be granted by the BLM Authorized Officer because indurated bedrock, such as sandstone, is at or within 2 feet of the surface and the soil type has a poor history for successful rehabilitation.

5. Location and Type of Water Supply:

Water for drilling purposes will be obtained from Dalbo Inc.'s underground well located in Ouray, Utah, Sec.32, T4S,R3E, Water User Claim #43-8496, Application #53617.

Where available a 2" or 3" poly pipe will be installed with the existing rights-of-way to supply water during drilling and completion operations. There will be no new disturbance needed and the poly line will be removed after completion operations. The fresh water will be supplied from the power plant located within the following Sections 23, 24, 25, 26, 35, & 36, T8S, R23E.

Water will be hauled to location over the roads marked on Maps A and B.

No water well is to be drilled on this lease.

Hatch 923-15P Surface Use and Operations Plan

Page 3

6. Source of Construction Materials:

Surface and subsoil materials in the immediate area will be utilized.

Any gravel will be obtained from a commercial source.

7. <u>Methods of Handling Waste Materials:</u>

Drill cuttings will be contained and buried in the reserve pit.

Drilling fluids, including salts and chemicals, will be contained in the reserve pit. Upon termination of drilling and completion operations, the liquid contents of the reserve pit will be removed and disposed of at an approved waste disposal facility within 120 days after drilling is terminated.

The reserve pit will be constructed on the location and will not be located within natural drainage, where a flood hazard exists or surface runoff will destroy or damage the pit walls. The reserve pit will be constructed so that it will not leak, break, or allow discharge of liquids.

A plastic reinforced liner is to be used as discussed during on-site inspection. It will be a minimum of 20 mil thick and felt, with sufficient bedding used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash or scrap that could puncture the liner will be disposed of in the pit.

Any spills of oil, gas, salt water, or other noxious fluids will be immediately cleaned up and removed to an approved disposal site.

A chemical porta-toilet will be furnished with the drilling rig.

Garbage, trash, and other waste materials will be collected in a portable, self-contained, fully enclosed trash cage during operations. No trash will be burned on location.

All debris and other waste material not contained in the trash cage will be cleaned up and removed from the location immediately after removal of the drilling rig.

Any open pits will be fenced during the operations. The fencing will be maintained until such time as the pits are backfilled.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

Any produced water from the proposed well will be contained in a water tank and will then be hauled by truck to one of the pre-approved disposal sites: RNI, Sec. 5, T9S, R22E, NBU #159, Sec.35, T9S, R21E, Ace Oilfield, Sec. 2, T6S, R20E, MC&MC, Sec. 12, T6S, R19E. (Request is in lieu of filing Form 3160-5, after initial production).

8. Ancillary Facilities:

None are anticipated.

9. Well Site Layout: (See Location Layout Diagram)

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills, and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

39 inch net wire will be used with at least one strand of barbed wire on top of the net wire. Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.

The net wire shall be no more than two inches above the ground. The barbed wire shall be three inches over the net wire. Total height of the fence shall be at least 42 inches.

Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.

Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any 2 fence posts shall be no greater than 16 feet.

All wire shall be stretched, by using a stretching device, before it is attached to corner posts.

The reserve pit fencing will be on three sides during drilling operations, and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

10. Plans for Reclamation of the Surface:

Producing Location:

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, materials, trash, and debris not required for production.

Immediately upon well completion, any hydrocarbons in the pit shall be removed in accordance with 43 CFR 3162.7-1.

Before any dirt work associated with location restoration takes place, the reserve pit shall be as dry as possible. All debris in it will be removed. Other waste and spoil materials will be disposed of immediately upon completion of operations.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 90 days from the date of well completion, weather permitting.

To prevent surface water(s) from standing (ponding) on the reclaimed reserve pit area, final reclamation of the reserve pit will consist of "mounding" the surface three feet above surrounding ground surface to allow the reclaimed pit area to drain effectively.

Upon completion of backfilling, leveling, and recontouring of the pit, the stockpiled topsoil will be spread evenly over the location up to the rig anchor points, the location shall be reshaped to

Hatch 923-15P Surface Use and Operations Plan Page 5

the original contour to the extent possible, and the location will be reseeded with Crested Wheatgrass using appropriate reclamation methods.

Dry Hole/Abandoned Location:

Abandoned well sites, roads, and other disturbed areas will be restored as near as practical to their original condition. Where applicable, these conditions include the re-establishment of irrigation systems, the re-establishment of appropriate soil conditions, and re-establishment of vegetation as specified.

All disturbed surfaces will be recontoured to the approximate natural contours, with reclamation of the well pad and access road to be performed as soon as practical after final abandonment. Reseeding operations will be performed after completion of other reclamation operations.

11. Surface Ownership:

United States of America Bureau of Land Management 170 South 500 East Vernal, UT 84078 (435) 789-1362

12. Other Information:

A Class III archaeological survey and a paleontological survey have been completed and the reports will be submitted separately.

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, the approved Plan of Operations, and any applicable Notice of Lessees. The Operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to ensure compliance. The Operator will control noxious weeds along Rights-Of-Way for roads, pipelines, well sites, or other applicable facilities.

This location is not within 460' from the boundary of the Natural Buttes Unit, nor is it within 460' of any non-committed tract lying within the boundaries of the Unit.

Seed Mixture:

The following seed mixture will be used during interim reclamation:

Black Sagebrush

12 lb/acre

Shadescale

12 lb/acre

Operator will contact the BLM for the seed mixture when final reclamation of the location occurs.

13. <u>Lessee's or Operators's Representative & Certification:</u>

Kevin McIntyre
Regulatory Analyst
Kerr-McGee Oil & Gas Onshore LP
1099 18th Street #1200
Denver, CO 80202
(720) 929-6226

Randy Bayne Drilling Manager Kerr-McGee Oil & Gas Onshore LP 1368 South 1200 East Vernal, UT 84078 (435)781-7018

Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Kerr-McGee Oil & Gas Onshore LP is considered to be the operator of the subject well. Kerr-McGee Oil & Gas Onshore LP agrees to be responsible under the terms and the conditions of the lease for the operations conducted upon leased lands.

Bond coverage pursuant to 43 CFR 3104 for the lease activities is being provided by BLM Nationwide Bond WYB000291.

I hereby certify that the proposed drill site and access route has been inspected and that I am familiar with the conditions that currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed by the Operator, its contractors, and subcontractors in conformity with this plan and the terms and conditions under which it is approved.

Kevin McIntyre


May 2, 2008

Date



KERR-McGEE OIL & GAS ONSHORE LP DRILLING PROGRAM

COMPANY	NAME [KERR-McGEE	OIL & GAS ON	SHORE LP		DATE	May 6, 2008				
WELL NAM	1E _	Hatch 923-	15P			TD		8,570'	MD/TVD		
FIELD	Natural Butte	es	COUNTY Uinta	h :	STATE	Utah	ELI	VATION	5,072' GL	KE	3 5,087'
SURFACE	LOCATION	SESE 650	' FSL & 860' FEL	Sec. 15, T	9S R 23I	Ē				BHL	Straight Hole
		Latitude:	40.030550	Longitude:	-10	9.306000		NAD 27			
OBJECTIV	E ZONE(S)	Wasatch/M	esaverde								
ADDITIONA	AL INFO	Regulatory Agencies: BLM (StJRE & MINERALS) LIDOGM Tri-County Health Dept									

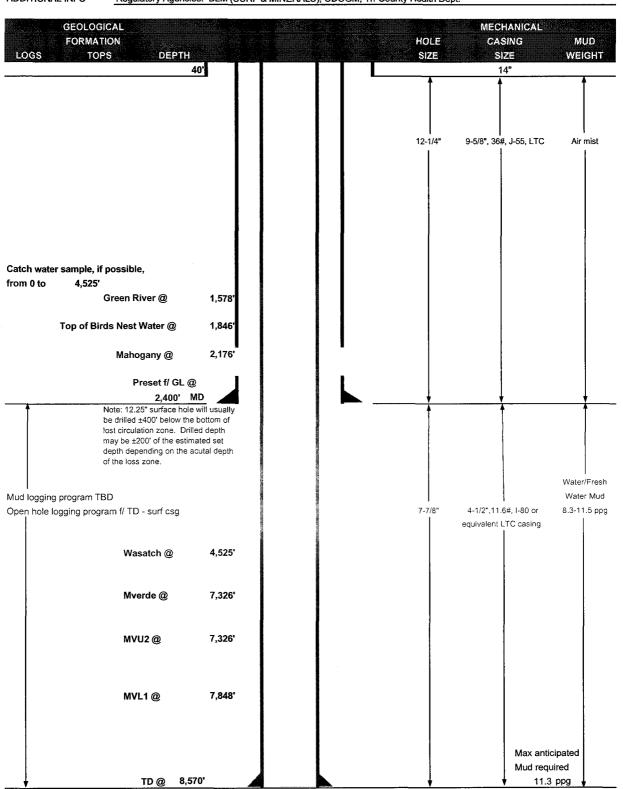



CASING PROGRAM

	20 - 2 - 20 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -							I	ESIGN FACT	ORS
	SIZE	IN	TERV	۱L	WT.	GR.	CPLG.	BURST	COLLAPSE	TENSION
CONDUCTOR	14"		0-40'							
								3520	2020	453000
SURFACE	9-5/8"	0	to	2,400'	36.00	J-55	LTC	1.12	1.80	5.99
								7780	6350	201000
PRODUCTION	4-1/2"	0	to	8570	11.60	I-80	LTC	2.47	1.26	2.32
	L				<u> </u>					

¹⁾ Max Anticipated Surf. Press.(MASP) (Surface Casing) = (Pore Pressure at next csg point-(0.22 psi/ft-partial evac gradient x TVD of next csg point)

(Burst Assumptions: TD = 11.3 ppg)

.22 psi/ft = gradient for partially evac wellbore

(Collapse Assumption: Fully Evacuated Casing, Max MW)

(Tension Assumptions: Air Weight of Casing*Buoy.Fact. of water)

MASP 3428 psi

CEMENT PROGRAM

	ı			marita di Labara		Character and Company of the Company	
		FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE	LEAD	500	Premium cmt + 2% CaCl	215	60%	15.60	1.18
Option 1			+ .25 pps flocele				
т	OP OUT CMT (1)	250	20 gals sodium silicate + Premium cmt	100		15.60	1.18
			+ 2% CaCl + .25 pps flocele				
т	OP OUT CMT (2)	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
SURFACE			NOTE: If well will circulate water to surfa	ce, option	2 will be uti	lized	
Option 2	LEAD	2000	Prem cmt + 16% Gel + 10 pps gilsonite	230	35%	11.00	3.82
			+.25 pps Flocele + 3% salt BWOC				
	TAIL	500	Premium cmt + 2% CaCl	180	35%	15.60	1.18
			+ .25 pps flocele				
	ТОР ООТ СМТ	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
PRODUCTION	LEAD	4,020'	Premium Lite II + 3% KCI + 0.25 pps	440	60%	11.00	3.38
			celloflake + 5 pps gilsonite + 10% gel		2 to 6 gains		n in Assig
		THE PERSON OF THE	+ 0.5% extender	nian Innas a nahari sa 1911		Tell to see that in the results	
						and a great	
	TAIL	4,550'	50/50 Poz/G + 10% salt + 2% gel	1270	60%	14.30	1.31
			+.1% R-3				

^{*}Substitute caliper hole volume plus 0% excess for LEAD if accurate caliper is obtained

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe.
PRODUCTION	Float shoe, 1 jt, float collar. Centralize first 3 joints & every third joint to top of tail cement with bow spring centralizers.

ADDITIONAL INFORMATION

DRILLING SUPERINTENDENT:

	Test casing head to 750 psi after	er installing. Test surface casing to 1,500 psi prior to drilling out.
	BOPE: 11" 5M with one annula	r and 2 rams. Test to 5,000 psi (annular to 2,500 psi) prior to drilling out. Record on chart recorder &
	tour sheet. Function test rams	on each trip. Maintain safety valve & inside BOP on rig floor at all times. Kelly to be equipped with upper
	& lower kelly valves.	
	Drop Totco surveys every 2000	'. Maximum allowable hole angle is 5 degrees.
	Most rigs have PVT Systems for	r mud monitoring. If no PVT is available, visual monitoring will be utilized.
	Most rigs have PVT Systems for	r mud monitoring. If no PVT is available, visual monitoring will be utilized.
LING	ENGINEER:	DATE:
		Brad Lanev

DATE:

Randy Bayne Hatch 923-15P.xls


²⁾ MASP (Prod Casing) = Pore Pressure at TD - (.22 psi/ft-partial evac gradient x TD)


^{*}Substitute caliper hole volume plus 10% excess for TAIL if accurate caliper is obtained


Kerr-McGee Oil & Gas Onshore LP HATCH #923-15P SECTION 15, T9S, R23E, S.L.B.&M.


PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 0.3 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 12.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN RIGHT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 1.7 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 1.9 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN RIGHT AND PROCEED IN A SOUTHEASTERLY DIRECTION APPROXIMATLEY 0.5 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN LEFT AND PROCEED IN A SOUTHEASTERLY DIRECTION APPROXIMATELY 4.5 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHEAST; TURN LEFT AND PROCEED IN A NORTHEASTERLY DIRECTION APPROXIMATLEY 2.4 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN RIGHT AND PROCEED IN A SOUTHEASTERLY DIRECTION APPROXIMATELY 0.4 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING REHABED ROAD TO THE NORTHEAST; TURN LEFT AND PROCEED IN A NORTHEASTERLY DIRECTION APPROXIMATLEY 0.2 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE NORTHEAST; FOLLOW ROAD FLAGS IN A NORTHEASTERLY DIRECTION APPROXIMATELY 260' TO THE PROPOSED LOCATION.


TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 55.2 MILES.

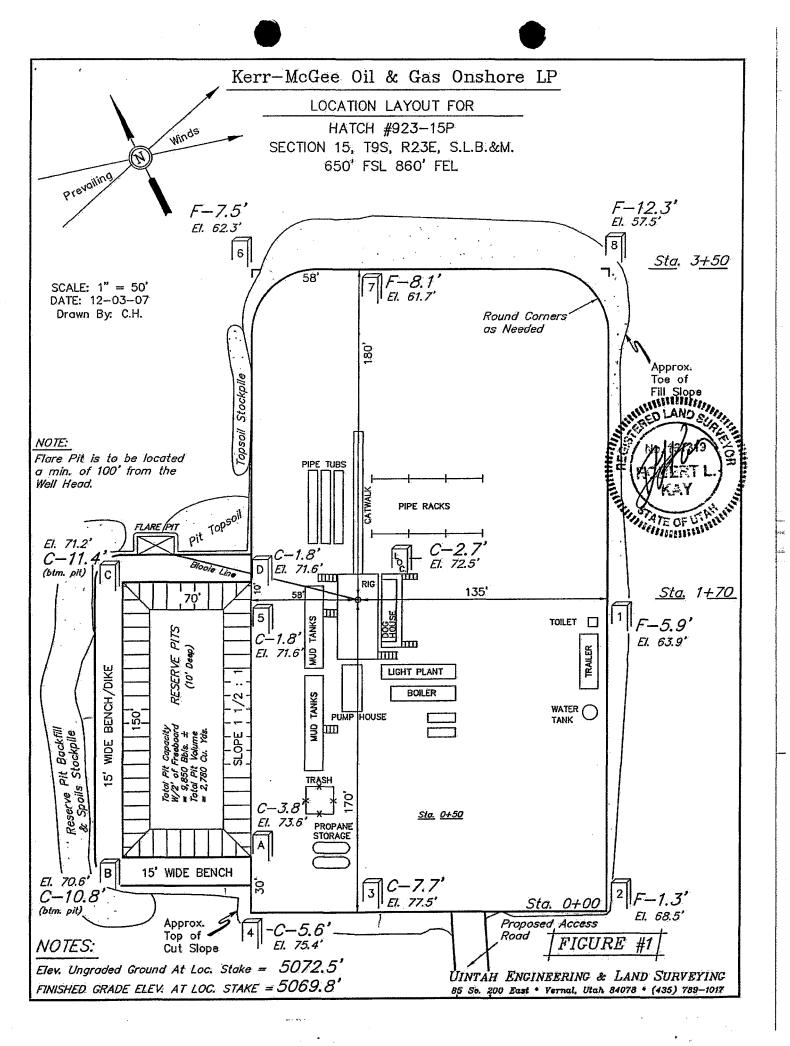


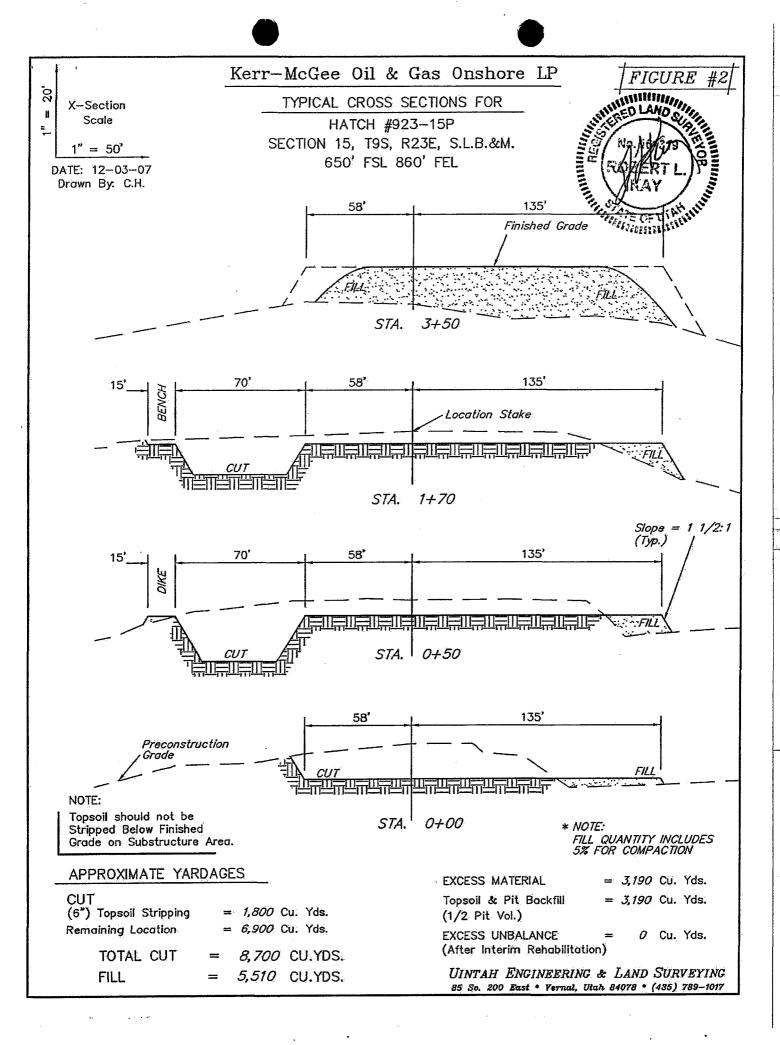

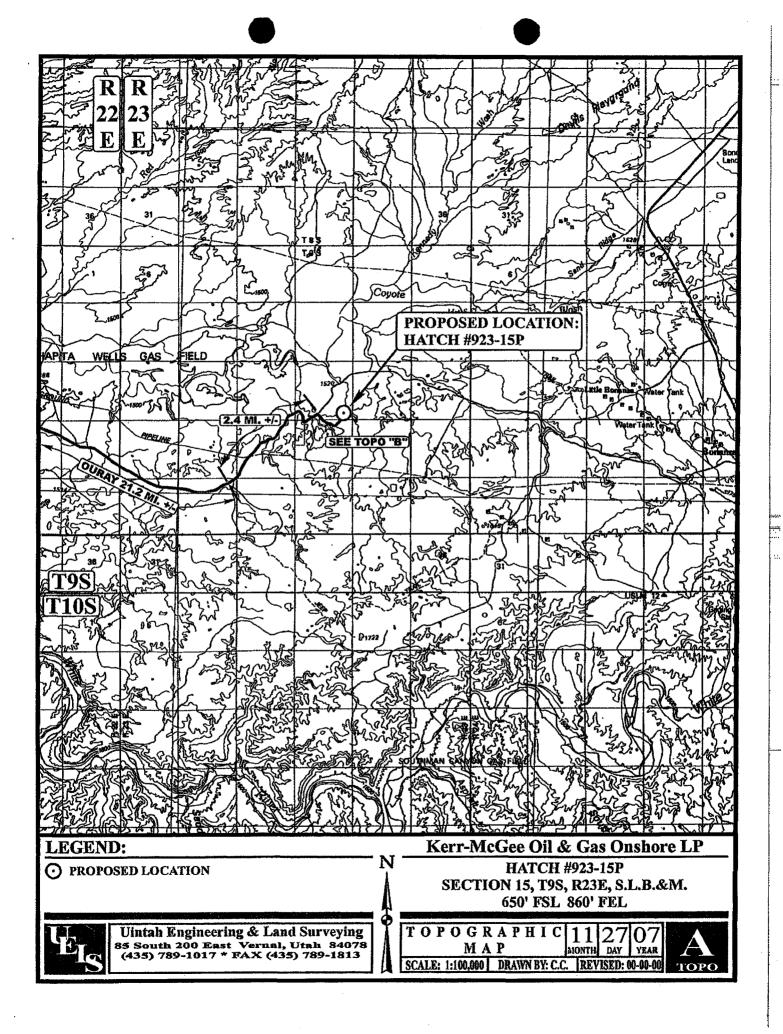

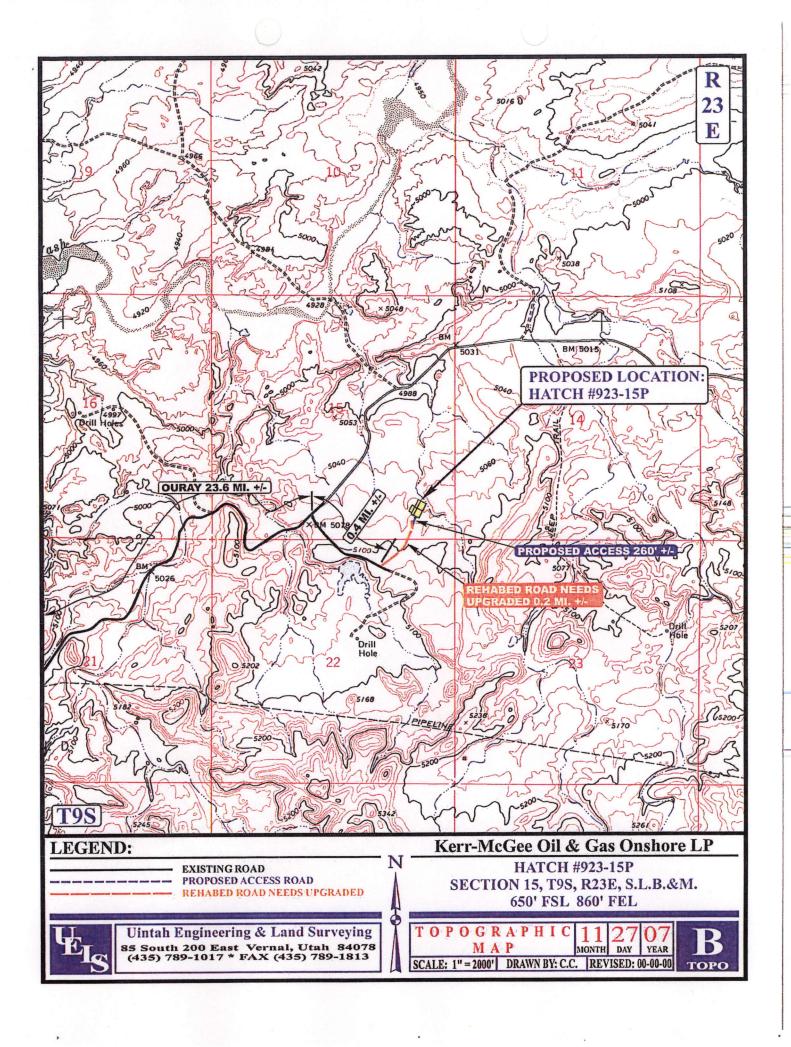

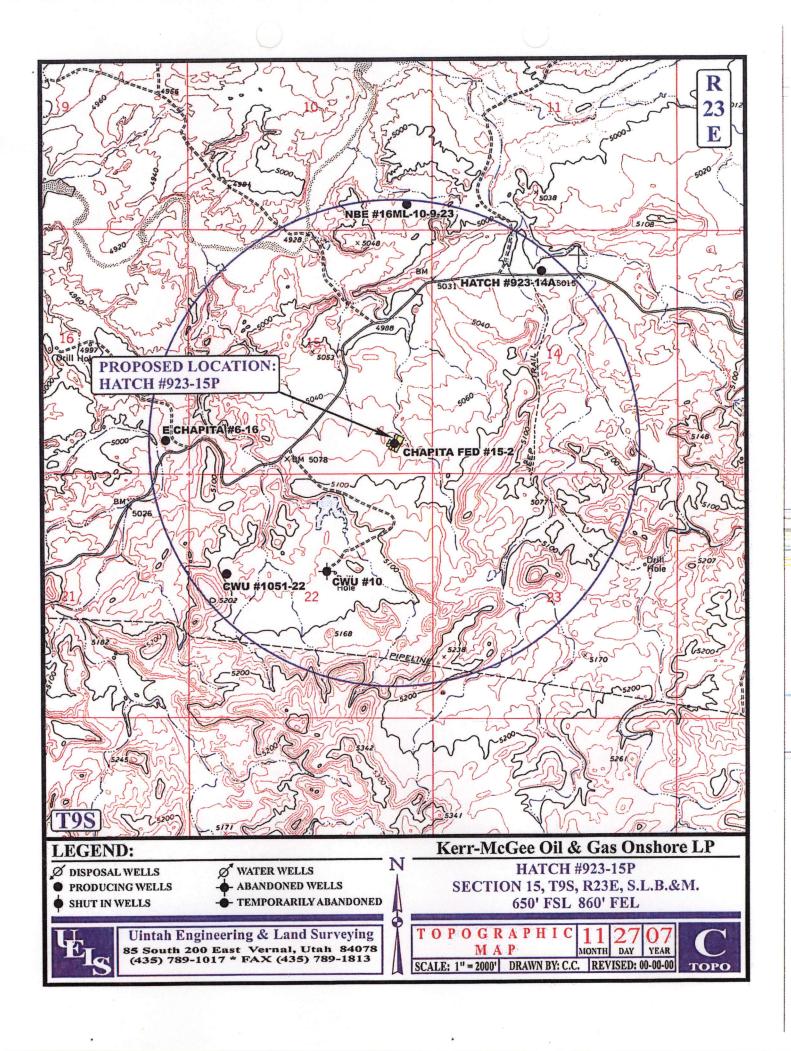

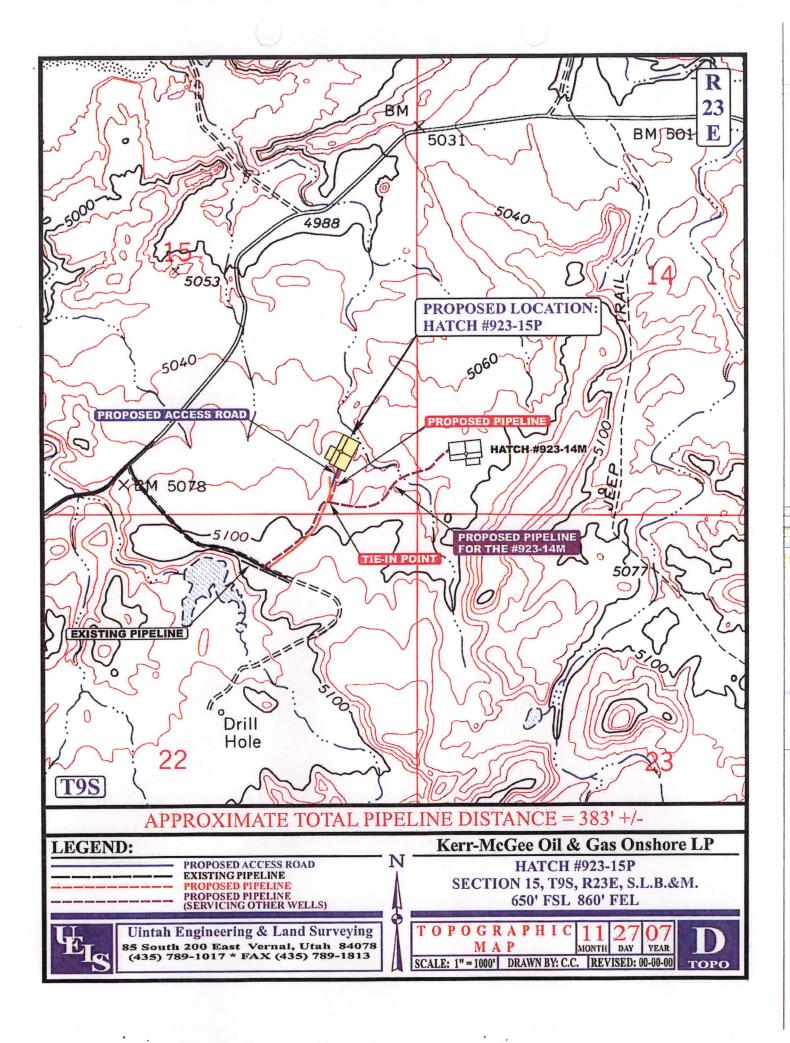

Kerr-McGee Oil & Gas Onshore LP

HATCH #923-15P PIPELINE ALIGNMENT

PIPELINE ALIGNMENT
LOCATED IN UINTAH COUNTY, UTAH
SECTION 15, T9S, R23E, S.L.B.&M.

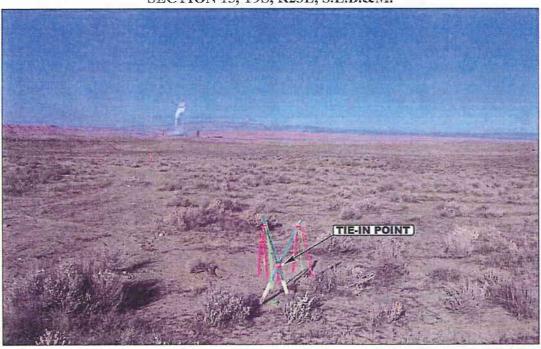


PHOTO: VIEW OF TIE-IN POINT

CAMERA ANGLE: NORTHEASTERLY

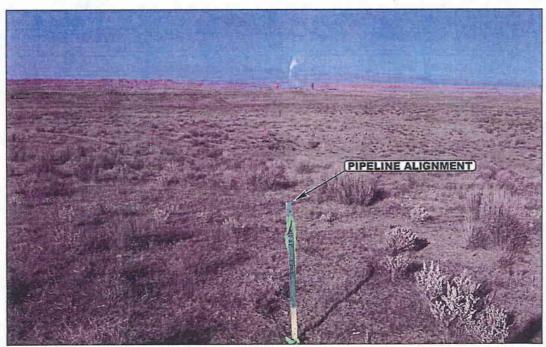


PHOTO: VIEW OF PIPELINE ALIGNMENT

CAMERA ANGLE: NORTHEASTERLY



Uintah Engineering & Land Surveying 85 South 200 East Vernal, Utah 84078 435-789-1017 uels@uelsinc.com


PIPELINE PHOTOS

11 27 07 MONTH DAY YEAR

РНОТО

TAKEN BY: J.R. DRAWN BY: C.C. REVISED: 00-00-00

APD RECEIVED: 05/09/2008	API NO. ASSIG	GNED: 43-047	-40063		
WELL NAME: HATCH 923-15P OPERATOR: KERR-MCGEE OIL & GAS (N2995) CONTACT: KEVIN MCINTYRE	PHONE NUMBER:	720-929-6226	<u> </u>		
PROPOSED LOCATION:	INSPECT LOCATE	I BY: /			
SESE 15 090S 230E	Tech Review	Initials	Date		
SURFACE: 0650 FSL 0860 FEL BOTTOM: 0650 FSL 0860 FEL	Engineering	<u> </u>			
COUNTY: UINTAH	Geology				
LATITUDE: 40.03058 LONGITUDE: -109.3060	2				
UTM SURF EASTINGS: 644545 NORTHINGS: 44323 FIELD NAME: NATURAL BUTTES (630	0.1.0	<u> </u>			
LEASE TYPE: 1 - Federal LEASE NUMBER: UTU-01301 SURFACE OWNER: 1 - Federal	PROPOSED FORMA COALBED METHAN		/D		
Plat Bond: Fed[1] Ind[] Sta[] Fee[] (No. WYB000291) Potash (Y/N) Oil Shale 190-5 (B) or 190-3 or 190-13 Water Permit (No. 43-8496) RDCC Review (Y/N) (Date:) MAR Fee Surf Agreement (Y/N) Intent to Commingle (Y/N)	LOCATION AND SITING: R649-2-3. Unit: R649-3-2. General Siting: 460 From Qtr/Qtr & 920' Between We. R649-3-3. Exception Drilling Unit Board Cause No: Eff Date: Siting: R649-3-11. Directional Drill				
STIPULATIONS: 1- Joseph 2- Spacing	Depresso				

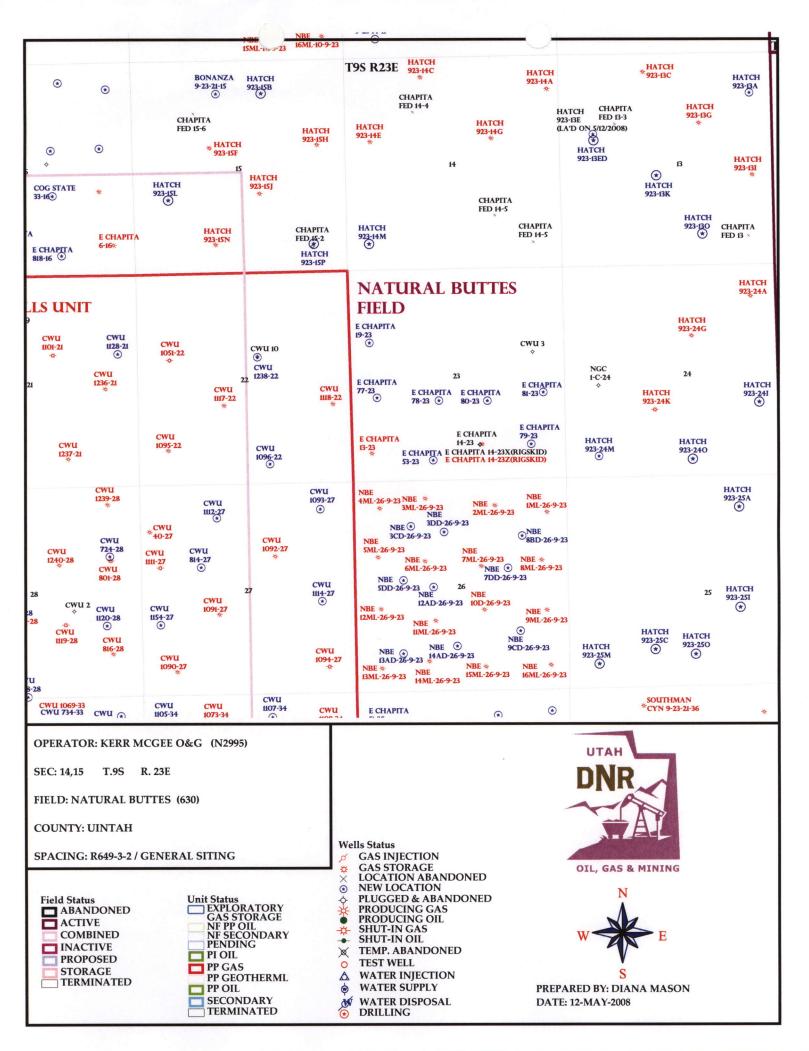



Lieutenant Governor



MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

May 12, 2008

Kerr McGee Oil & Gas Onshore, LP 1099 18th Street, #600 Denver, CO 80202

Re:

Hatch 923-15P Well, 650' FSL, 860' FEL, SE SE, Sec. 15, T. 9 South, R. 23 East,

Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann.§ 40-6-1 et seq., Utah Administrative Code R649-3-1 et seq., and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-40063.

Sincerely,

Gil Hunt

Associate Director

High

pab Enclosures

cc:

Uintah County Assessor

Bureau of Land Management, Vernal Office



Operator:	Kerr McGee Oil & Gas Onshore, LP					
Well Name & Number	Hatch 923-15P	, p.				
API Number:	43-047-40063					
Lease:	<u>UTU-01301</u>					
Location: SE SE	Sec. 15	T. 9 South	R. 23 East			

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

• Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

• Contact Dustin Doucet at (801) 538-5281 office (801) 733-0983 home

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

- 4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.
- 5. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.



GARY R. HERBERT Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA

Division Director

February 24, 2009

Raleen White Anadarko Petroleum Corp. PO Box 173779 Denver, CO 80217-3779

APDs Rescinded at the request of Anadarko Petroleum Corp. Re:

Dear Ms. White:

Enclosed find the list of APDs that you requested to be rescinded to Anadarko Petroleum Corp. No drilling activity at these locations has been reported to the division. Therefore, approval to drill these wells is hereby rescinded, effective February 20, 2009.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject locations.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,

Environmental Scientist

cc:

Well File

Bureau of Land Management, Vernal

SITLA, Ed Bonner



43047395730000	FEDERAL 1021-23P	10S	21E	23	SESE
43047395770000	FEDERAL 1021-25I	10S	21E	25	NESE
43047395760000	FEDERAL 1021-25M	10S	21E	25	swsw
43047397930000	Federal 1021-25N	10S	21E	25	SESW
43047395810000	FEDERAL 1021-34K	10S	21E	34	NESW
43047395520000	FEDERAL 1021-34M	10S	21E	34	SWSW
43047395560000	FEDERAL 1021-34P	10S	21E	34	SESE
43047389890000	FEDERAL 1021-35F	10S	21E	35	SENW
43047389760000	FEDERAL 1021-35G	10S	21E	35	SWNE
43047389380000	FEDERAL 1021-35H	10S	21E	35	SENE
43047389350000	FEDERAL 1021-35I	10S	21E	35	NESE
43047389330000	FEDERAL 1021-35P	10S	21E	35	SESE
43047389370000	FEDERAL1021-35A	10S	21E	35	NENE
43047365050000	LOVE 1121-2B	118	21E	02	NWNE
43047394050000	LOVE UNIT 1121-10NT	11S	21E	10	SESW
43047393910000	LOVE UNIT 1121-3NT	115	21E	03	SWSW
43047388240000	LOVE UNIT 1122-18C	118	22E	18	NENW
43047388250000	LOVE UNIT 1122-18J	118	22E	18	NWSE
43047388260000	LOVE UNIT 1122-18K	11S	22E	18	NESW
43047396050000	LOVE UNIT 1122-18L	118	22E	18	NWSW
43047396030000	LOVE UNIT 1122-19C	11S	22E	19	NENW
43047386310000	MULLIGAN 823-23H	08S	23E	23	SENE
43047387130000	MULLIGAN 823-240	08S	23E	24	SWSE
43047393730000	NBU 1020-1KT	10S	20E	01	NESW
43047393740000	NBU 1020-24BT	108	20E	24	NWNE
43047393760000	NBU 1021-11I	10S	21E	11	NESE
43047393800000	NBU 1021-11M	10S	21E	11	SWSW
43047393790000	NBU 1021-11P	10S	21E	11	SESE
4304739383	NBU 1021-12A	10S	21E	12	NENE
43047393860000	NBU 1021-12L - STATE	108	21E	12	NWSW
43047393840000	NBU 1021-12N	10S	21E	12	SESW
43047395470000	NBU 1021-15F	10S	21E	15	SENW
43047395460000	NBU 1021-15L	10S	21E	15	NWSW
43047395630000	NBU 1021-15P	10S	21E	15	SESE
43047395260000	NBU 1021-20G STATE/FED	108	21E	20	SWNE
43047395340000	NBU 1021-20J STATE/FED	10S	21E	20	NWSE
43047395330000	NBU 1021-20K STATE/FED	10S	21E	20	NESW
43047395320000	NBU 1021-20L STATE/FED	10S	21E	20	NWSW
43047395310000	NBU 1021-200 STATE/FED	10S	21E	20	SWSE
43047375280000	NBU 1021-21C (FKA C275)	108	21E	21	NENW
43047367020000	NBU 1021-21H	10S	21E	21	SENE
43047395500000	NBU 1021-22A	10S	21E	22	NENE
43047394030000	NBU 1021-23FT	10S	22E	23	SENW
43047395600000	NBU 1021-23L	10S	21E	23	NWSW
43047395780000	NBU 1021-25F	108	21E	25	SENW
43047395750000	NBU 1021-25J	10S	21E	25	NWSE
43047395610000	NBU 1021-25K	10S	21E	25	NESW

43047395800000	NBU 1021-26D	10S	21E	26	NWNW
43047395790000	NBU 1021-26E	108	21E	26	SWNW
43047379680000	NBU 1021-6C	10S	21E	06	NENW LOT 3
43047379670000	NBU 1021-6D	108	21E	06	NWNW LOT 4
43047379410000	NBU 1021-7B	108	21E	07	NWNE
43047401850000	NBU 921-31BT	098	21E	31	NWNE
43047363950000	NBU 921-33K	098	21E	33	NESW
4304740038	HATCH 923-13A	09S	23E	13	NENE
4304740060	HATCH 923-13ED	09S	23E	13	SWNW
4304740059	HATCH 923-13O	098	23E	13	SWSE
4304740061	HATCH 923-14M	098	23E	14	SWSW
4304740143	HATCH 923-140	098	23E	14	SWSE
4304740064	HATCH 923-15B	098	23E	15	NWNE
4304740062	HATCH 923-15L	098	23E	15	NWSW
4304740063	HATCH 923-15P	09S	23E	15	SESE
4304740065	HATCH 923-240	098	23E	24	SWSE
4304740069	HATCH 923-25A	09S	23E	25	NENE
4304740068	HATCH 923-251	098	23E	25	NESE
4304740070	HATCH 923-25O	098	23E	25	SWSE
43047388010000	FEDERAL 1022-15H	108	22E	15	SENE
4304739388	FEDERAL 1022-15K	108	22E	15	NESW
43047389240000	FEDERAL 1022-15L	108	22E	15	NWSW



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Green River District-Vernal Field Office 170 South 500 East Vernal, UT 84078 (435) 781-4400 Fax: (435) 781-4410

http://www/blm.gov/ut/st/en/fo/vernal/html

TAKE PRIDE

IN REPLY REFER TO: 3160 LLUTG01100

March 19, 2009

Raleen White Kerr McGee Oil & Gas Onshore LP PO Box 173779 Denver, CO 80217-3779 43-047. 40063

Re:

Return Unapproved APD Well No. Hatch 923-15P SESE, Sec. 15, T9S, R23E Uintah County, Utah Lease No. UTU-01301

Dear Ms. White:

The Application for Permit to Drill (APD) for the above referenced well received May 9, 2008, is being returned unapproved per your request to this office in an email message on February 20, 2009. If you intend to drill at this location at a future date, a new APD must be submitted.

If you have any questions regarding this matter, please contact me at (435) 781-4455.

Sincerely,

Cindy Severson

Cindy Severson
Land Law Examiner

Enclosures

cc:

UDOGM

RECEIVED MAR 3 0 2009

DIV. OF OIL, GAS & MINING